

- Easy to order
- Configuration flexibility
- Excellent value
- No tools required for assembly
- RoHS compliant

Technical data

Fluid
Compressed air
Maximum pressure
175 psig (12 bar)
Operating temperature*
-4° to 125°F (-20° to 52°C)
* Air supply must be dry enough to avoid ice formation at temperatures below 35°F (2°C).

Materials

Body: PBT
Transparent bowl: Polycarbonate
Elastomers:
Bowl O-ring - Neoprene
All others - nitrile
Sight-feed dome: Transparent nylon
Recommended lubricant: DTE Light
Internal parts: Acetal




Order Information

Models listed includes oil-fog lubrication, closed bottom bowl, and sight feed dome.

Port Size	Part Number	Flow* scfm (dm3/s)	Weight lbs (kg)
1/4" PTF	L92C2APETN	50 (24)	0.42 (.19)
3/8" PIF	L92C6EPETN	40 (19)	0.40 (.18)

*Typical flow with 90 psig (6.3 bar) inlet pressure and a pressure drop of 7 psid (0.5 bar d)

Flow Characteristics

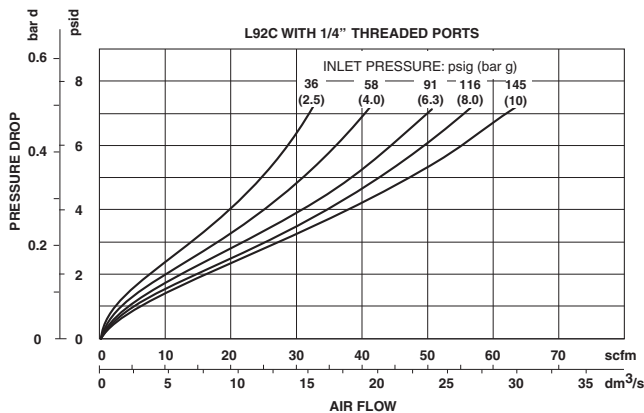

L92C ★★ PETN

Substitute	Description
NN*	no connection
1A	1/8" PTF
2A	1/4" PTF
3A	3/8" PTF
1B	1/8" ISO Rc
2B	1/4" ISO Rc
3B	3/8" ISO Rc
1G	1/8" ISO G
2G	1/4" ISO G
3G	3/8" ISO G
6D	6mm PIF
8D	8mm (5/16") PIF
AD	10mm PIF
BD	12mm PIF
4E	1/4" PIF
6E	3/8" PIF
8E	1/2" PIF
2R*	1/4" PTF
2T*	1/4" ISO Rc
2V*	1/4" ISO G

* Does not include mounting bracket

L92C Oil-Fog Lubricator

All Dimensions in Inches (mm)



Accessories and Kits

Threaded connector w/mounting bracket*		Push-In-Fitting connector w/mounting bracket*		Threaded connector w/o mounting brackets		Porting block		Quikconnect (quantity of 1)
Connection	P/N	Connection	P/N	Connection	P/N	Connection	P/N	P/N
1/8" PTF	9212KIT-1A	6mm PIF	9213KIT-6D	1/4" PTF	9211KIT-2R	1/4" PTF	9216-50	9210-50
1/4" PTF	9212KIT-2A	8mm (5/16") PIF	9213KIT-8D	1/4" ISO Rc	9211KIT-2T	1/4" ISO G	9216-51	
3/8" PTF	9212KIT-3A	10mm PIF	9213KIT-AD	1/4" ISO G	9211KIT-2V	1/4" ISO Rc	9216-52	
1/8" ISO Rc	9212KIT-1B	12mm PIF	9213KIT-BD					
1/4" ISO Rc	9212KIT-2B	1/4" PIF	9213KIT-4E					
3/8" ISO Rc	9212KIT-3B	3/8" PIF	9213KIT-6E					
1/8" ISO G	9212KIT-1G	1/2" PIF	9213KIT-8E					
1/4" ISO G	9212KIT-2G							
3/8" ISO G	9212KIT-3G							

* Use 1/4" (6 mm) screws, and appropriate washers when attaching brackets to a surface.

Service kit P/N L92C-KIT Includes bowl O-ring, and sight feed dome seal	Locking plate kits**	
	P/N 9236-88/X10 (qty 10) (fits filter, lubricator, lockout, and back of all units)	P/N 9236-89/X10 (qty 10) (fits regulator, filter/regulator, and porting block)

⚠️ ** Locking plates **MUST** be in place before pressurizing any Excelon Pro unit.

